

SELF OSCILLATING SWITCHED- CAPACITOR DC-DC CONVERTOR USING 28nm UTBB FD-SOI

M SIRISHA REDDY

ECE Department,

Nalla Narashima Reddy Education society's Group
of institutions

S SUSHMA SREETHI

ECE Department,

Nalla Narashima Reddy Education society's Group
of institutions

Abstract:


The importance of energy-especially for ultra-portable sensor-based platforms for the Internet-of-Things (IoT). Processors for these IoT applications primarily operate at near-threshold (NT) voltages and have multiple power modes. Achieving high conversion efficiency within the DC-DC converter that supplies these processors is critical since energy consumption of the DC-DC/processor system is proportional to the DC-DC converter efficiency. The DC-DC converter must maintain high efficiency over a large load range generated from the multiple power modes of the processor. This paper presents a fully integrated step-down self-oscillating switched-capacitor DC-DC converter that is capable of meeting these challenges. The area of the converter is 0.0104 mm^2 and is designed in 28 nm ultra-thin body and buried oxide fully-depleted SOI (UTBB FD-SOI). Back-gate biasing within FD-SOI is utilized to increase the load power range of the converter. With an input of 1 V and output of 460 mV, measurements of the converter show a minimum efficiency of 75% for 79 nW to 200 μW loads. Measurements with an off-chip NT processor load show efficiency up to 86%. The converter's large load power range and high efficiency make it an excellent fit for energy-constrained processors.

Keywords: switched-capacitor; DC-DC converter; near-threshold voltage; self-oscillating; ultra-thin body and buried oxide fully-depleted SOI (UTBB FD-SOI); fully-depleted SOI (UTBB FD-SOI); sub-threshold; low voltage regulation

Introduction

The relevance of energy-constrained processors [1-6] in sensor-based platforms for Internet-of-Things (IoT) applications continues to grow. These processors typically operate at near-threshold (NT)

voltages since operation at NT significantly reduces energy consumption but avoids the large variance and performance penalties associated with sub-threshold voltages [1]. While operating at NT, energy-constrained processors utilize multiple active and standby power modes to achieve further energy savings [2-4]. The NT voltage must be supplied during each of these power modes to ensure functionality within always-on blocks such as memory, timers, and interrupt controllers [3,4]. As shown in Figure 1, NT voltages are typically supplied to energy-constrained processors by a DC-DC converter with a system supply or battery. The DC-DC converter is a critical block since the energy consumption of the DC-DC/processor system is proportional to the efficiency of the DC-DC converter. Achieving high efficiency in the DC-DC converter is therefore essential to realize energy savings associated with NT operation of the processor. Maintaining high efficiency over a large load

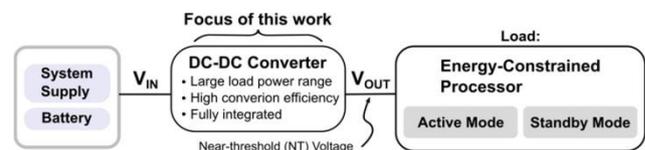

range is

also required since toggling between active and standby power modes induces $200\times$ [2] to $6000\times$ [3] changes in load power.

Figure 1. This work is focused on the DC-DC converter that supplies energy-constrained

processor loads.

Fully integrated switched-capacitor (SC) DC-DC converters are a logical choice for supplying energy-constrained processors as they can achieve high efficiency within digital CMOS processes [7]. However, achieving high efficiency in a SC DC-DC converter is challenging for the multiple order-of-magnitude changes in load power associated with different processor power modes. The SC self-oscillating topology [8] is a promising choice to meet this


In this work, the first (2:1) step-down self-oscillating DC-DC converter with a NT output voltage (V_{OUT}) is presented [9]. It is designed in 28 nm ultra-thin body and buried oxide fully-depleted SOI (UTBB FD-SOI). The NT output voltage levels limit the maximum load power range within the self-oscillating topology since the $|V_{GS}|$ of the charge-transfer switches is at or below the threshold voltage. This results in a low overdrive voltage, which subsequently limits the maximum load current that the charge-transfer switches can handle. Additionally, the maximum oscillation frequency of the self-oscillating topology is limited from such low $|V_{GS}|$ voltages. To address both of these previous limitations associated with low $|V_{GS}|$, this work utilizes body-biasing, or back-gate biasing, within the converter to increase the maximum load power. Back-gate biasing and the self-oscillating topology together enable a large load power range with high efficiency. Section 2 describes the similarities and differences of a conventional SC converter to the self-oscillating converter. The operation of the self-oscillating converter and the details of back-gate biasing are also described. Section 3 presents measurement results. Section 4 concludes the paper.

1. Self-Oscillating DC-DC Converter
Conventional Switched-Capacitor DC-DC Converter

A conventional 2:1 SC DC-DC converter is shown in Figure 2. This converter steps down the input voltage (V_{IN}) through a Switched-Capacitor Network (SCN). During a charge phase (ϕ_{charge}), V_{IN} charges C_{fly} and delivers charge to the output. A charge phase requires that only S_1 and S_3 be turned ON. During a

challenge due to its minimal control circuitry overhead and interleaved structure. The step-up self-oscillating topology introduced in [8] showed an efficiency of over 70% over a five order-of-magnitude change in load power. This performance was achieved with a step-up configuration, a varying (above-threshold) output voltage, and with charge-transfer switches operating well above the threshold voltage

discharge phase ($\phi_{discharge}$), the charge stored previously on C_{fly} is discharged to the output. The discharge phase requires that only S_2 and S_4 to be ON. The Clock Generator and Switch Signal Generator blocks provide signals to the gates of the switches (S_1 - S_4) that ensure the correct charge or discharge phase configuration. The self-oscillating converter, which is

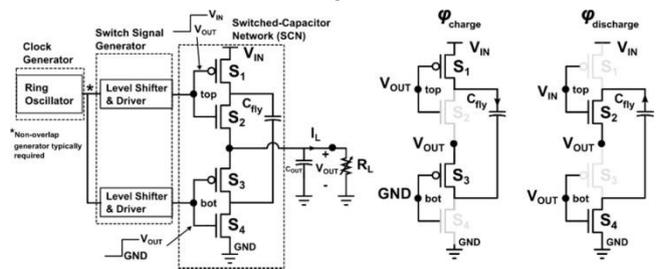

explained in the subsequent paragraph, has an SCN that operates in the same manner as the conventional converter, but it does not require the Clock Generator and Switch Signal Generator blocks. Eliminating the need for clock generation and level conversion overhead is advantageous for low power systems since they are the dominant power losses at sub-5 μW loads[8,10].

figure: A conventional 2:1 switched - capacitor topology


Step-Down Self-Oscillating DC-DC Converter. The 2:1 self-oscillating DC-DC converter is shown in Figure 3a. It is comprised of two stacked ring oscillators. The oscillators are synchronized through the fly capacitors ($C_{fly,1-5}$) and coupling capacitors C_c within the delay cell. The delay cell determines the oscillation frequency of the stacked ring oscillators. Modulating the oscillation frequency is used to maintain the output voltage over changes in load power.

Figure 3. (a) 2:1 self-oscillating DC-DC converter; (b) Simulated output of the converter at Stage 1; (c) Delay cell schematic

During oscillation, the SCN within each of the five stages alternates between a charge phase and discharge phase in the same manner as the conventional 2:1 converter shown previously in Figure 2. The converter is interleaved since each of the five stages delivers charge at different phase times. The simulated output from a single stage is shown in Figure 3b. The charge-transfer transistor lengths in each stage are twice the size of the minimum length to ensure leakage does not affect functionality at nW loads [11]. Only thin-oxide transistors are used within the converter. The fly capacitor in each stage is a 27pF MIM capacitor. In other words, there is 5×27 pF fly capacitance. Unlike MOS capacitors, the MIM capacitor does not suffer from large voltage dependences at near-threshold voltages or large bottom-plate capacitance losses. For the (active) load power levels in this design, bottom-plate capacitance is a dominant loss component.

The converter adjusts to changes in load power by tuning the delay within the delay cell. The delay cell (Di) within each stage determines the frequency of oscillation of the converter. As shown in Figure 3c, the delay cell consists of two leakage-based delay blocks [8] (*topdelay* and *botdelay*). These delay blocks operate identically and are coupled through a 0.2 pF MIM coupling capacitor C_c . The *botdelay* delay element from Stage 1 operates as follows. When the input to the delay cell (IN_{LD1}) transitions, two transistors within the positive feedback loop begin to leak between the drain and source. For example, for a low-to-high transition at IN_{LD1} , transistor A (B) has source-drain (drain-source) leakage. At some point, the leakage in A and B flips the state of the positive feedback loop and drives *bot,2* low-to-high. The transistor T_P is used to increase (decrease) the time to flip the state of the positive feedback loop by lowering (increasing) V_{CTRL} . Unlike [8], this design does not use an additional coupling capacitor between *top,2* and *bot,2* since simulations showed that it had minimal effect on the converter performance.

This subsection described the operation of the step-down self-oscillating converter. In the next subsection, the effects of back-gate biasing on the converter's performance are presented. Back-gate biasing affects both the delay cell and

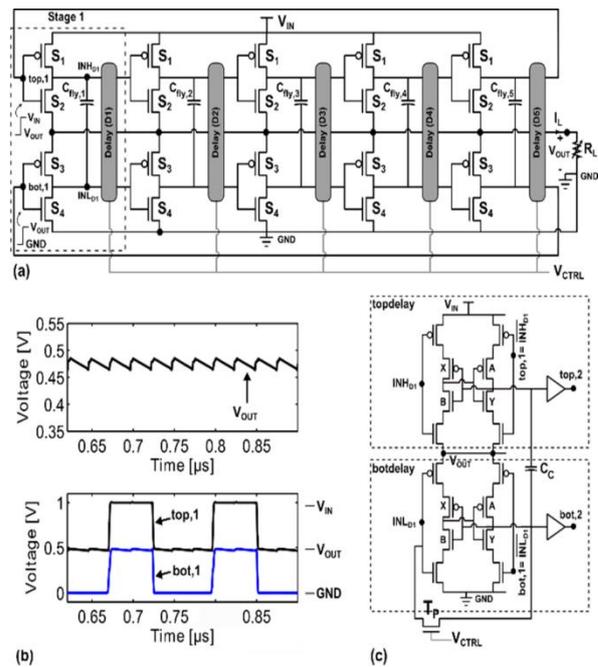

charge-transfer switches within the converter.

Back-Gate Biasing

Back-gate biasing is used to improve the performance of the converter. More specifically, back-gate biasing increases the maximum load power of the converter for two reasons. First, back-gate biasing increases the maximum drive strength of the charge-transfer switches. Since charge-transfer switches operate at or below the threshold voltage, the effect of back-gate biasing on drive strength is large. Second, back-gate biasing on the transistors within the delay cell increase leakage between the drain and source within the positive feedback loop, and thus, shift the oscillation frequency range to a higher values.

Back-gate biasing in UTBB FD-SOI is more effective in altering a transistor's threshold voltage (V_{th}) than in nanoscale bulk CMOS for two reasons [12]. First, the range of bias voltages is not limited by diode conduction since the back-gate node is isolated from the drain and source. Second, the body-bias factor (γ) is much larger than bulk CMOS. For example, 28 nm UTBB FD-SOI has $\gamma \approx 85$ mV/V, while bulk 28 nm CMOS has $\gamma \approx 25$ mV/V. The converter takes advantage of the large bias range and high body-bias factor in order to increase its load power range.

The back-gate biasing configuration for the converter is shown in Figure 4. The (LVT) PMOS transistors have a back-gate biasing

voltage source opposite in polarity but equal in magnitude to the (LVT) NMOS transistors. Increasing the back-gate bias voltage (V_{BB}) pushes both the PMOS and NMOS transistors further into forward body bias (FBB). As shown in Figure 4c, the effect of

the effect of increasing V_{BB} on a single charge-transfer switch in linear mode is larger at near-threshold values of V_{GS} . The $|V_{GS}|$ of each switch within the converter is near the threshold voltage since the output of the converter is a near-threshold voltage. Thus, there is strong motivation to utilize back-gate biasing within the converter.

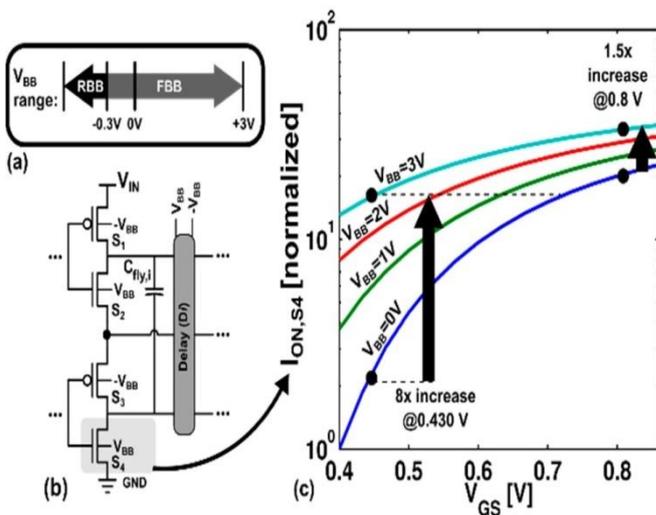


figure 4. (a) Back-gate biasing range; (b) Back-gate bias connections within the converter; (c) Simulated change in the drive strength of a single switch (S_4) in linear mode

The overall impact of back-gate biasing on the converter is found by examining the converter’s total output impedance (R_O). The total output impedance depends on contributions from both the slow-switching regime impedance (R_{SSL}) and the fast switching impedance (R_{FSL}) as in [13]:

$$R_O = \frac{1}{\frac{1}{R_{SS}} + \frac{1}{R_{FSL}}} \tag{1}$$

where K_C is 1 and K_S is 4 for the 2:1 converter, C_{tot} is the total fly capacitance (135 pF), and G_{tot} is the summed switch conductance. In order to account for back-gate bias voltages in R_O , G_{tot} needs to be identified. G_{tot} is described by

$$G_O = K \cdot W_i / L_i \sum_1^m K_i (V_{GSi} - V_{th,i}) \dots \dots \tag{2}$$

where m is the number of switches in one stage of the converter, k is the total number of stages within the converter, L_i and W_i are the charge-transfer switch sizes, K_i is the technology constant, and V_{GSi} is the gate-source voltage of the charge-transfer switch. From Equation (2), it can be seen that decreasing the threshold voltage ($V_{th,i}$) through increased V_{BB} results in a larger overdrive voltage, and thus, a larger G_{tot} . Using the back-gate biasing configuration from Figure 4, Equation (2) expands to

$$G_{tot} = 5(K_n \frac{W_n}{L_n} (V_{IN} - 2V_{thn} + \gamma_n (2V_{BB} - V_{OUT})) + 5(K_p \frac{W_p}{L_p} (V_{IN} - 2V_{thp} + \gamma_p (-2V_{BB} - V_{IN} - V_{OUT})) \dots \dots \tag{3}$$

Using G_{tot} from Equation (3), the converter’s total output impedance R_O from Equation (1) is plotted as a function of the converter’s switching frequency (f_{SW}) as shown in Figure 5. The R_O is plotted with two sets of back-gate bias voltages: $V_{BB} = 0$ V and $V_{BB} = 1$ V in Figure 5a and $V_{BB} = 0$ V and $V_{BB} = 2$ V in Figure 5b. Increasing the back-gate bias has two effects on the converter’s R_O . First, increasing V_{BB} shifts the range of f_{SW} to larger values. This is a result of a decreased delay within the delay cells. Larger values of f_{SW} enable larger load powers since R_{SSL} decreases with increased f_{SW} . Second, a larger V_{BB} increases the overdrive voltage of the converter, and thus, decreases the R_{FSL} . This lowers R_O and allows for larger load powers. In summary, increasing the back-gate bias decreases R_O . A lower R_O enables a larger maximum power ($P_{OUT,max}$) since $P_{OUT} \propto 1/R_O$

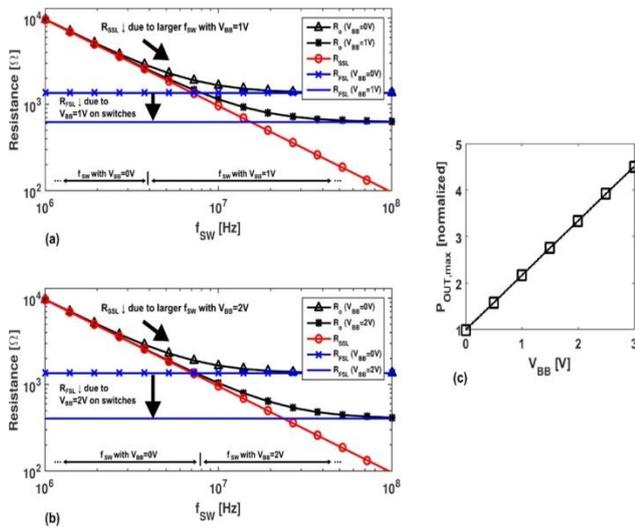


Figure 5. Analytical prediction of the converter output impedance from Equation (1). (a) $V_{BB} = 0$ V and $V_{BB} = 1$ V; (b) $V_{BB} = 0$ V and $V_{BB} = 2$ V; (c) Sweeping the maximum power $P_{OUT,max}$ as a function of V_{BB} . $P_{OUT,max}$ is normalized to the $P_{OUT,max}$ at $V_{BB} = 0$ V and uses only R_{FSL} contributions.


To further clarify the effects of V_{BB} on $P_{OUT,max}$, Figure 5c shows the increase in $P_{OUT,max}$ as V_{BB} is increased from 0 to 3 V. $P_{OUT,max}$ is estimated from Equation (1) using only the R_{FSL} contribution and is normalized to the value of $P_{OUT,max}$ with $V_{BB} = 0$ V. Increasing V_{BB} in the proposed converter from 0 to 3 V increases the $P_{OUT,max}$ by $4.5\times$.

Measurement Results

Measurement results from the 28 nm UTBB FD-SOI test chip are presented in this section. As shown in the annotated microphotograph of the test chip (Figure 6), all blocks within the converter are placed into a standard cell frame consisting of three power rails. This block organization simplifies the power routing and back-gate bias well connections between the five stages. The total area of the converter is 0.0104 mm². The back-gate bias well area increases the total converter area by 3.7%.

Due to the stacked ring oscillators, the self-oscillating converter is able to start-up without any auxiliary start-up control circuitry. Removing this control circuitry is especially beneficial in terms of efficiency at nW load powers (e.g., standby mode). A measurement of the converter at start-up is shown in Figure 7. An input voltage (V_{IN}) is stepped from 0 V to 1

V using the maximum slew-rate of an off-chip voltage source. For both output power levels ($P_{OUT} = 0$ μW and $P_{OUT} = 100$ μW), the converter stabilizes at approximately the same time that V_{IN} reaches 1 V. At $P_{OUT} = 0$ μW, the power consumption of the DC-DC converter is 15.6 nW.

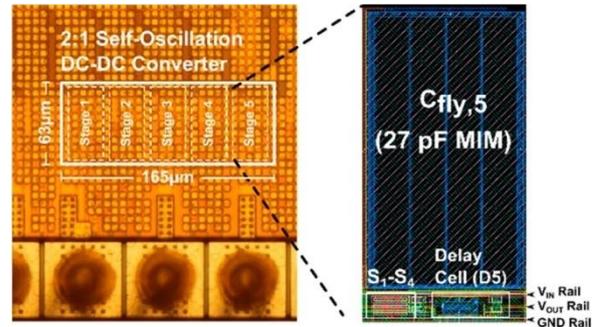


Technology	28 nm
Area	0.0104 mm ²
C_{out}	0
C_{fly}	135 pF

6. Annotated microphotograph of the 2:1 converter

Figure 7. Measured start-up of the self-oscillating converter as V_{IN} is increased from 0 V to 1 V at (a) $P_{OUT} = 100$ μW and (b) $P_{OUT} = 0$ μW.

The converter’s efficiency versus the output load power (P_{OUT}) is shown in Figure 8a. The efficiency is measured at two near-threshold output voltages ($V_{OUT} = 430$ mV and $V_{OUT} = 460$ mV). The converter’s load

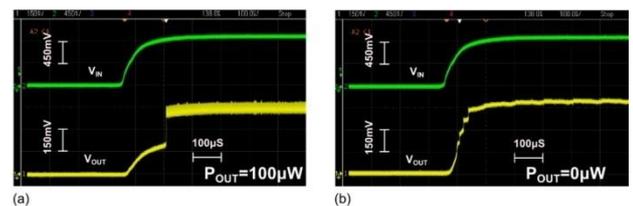


power range is extended significantly by applying a back-gate bias of $V_{BB} = 1$ V (i.e., PMOS back-gate biased with -1 V and NMOS with 1 V). The 1 V is generated from V_{IN} , while the -1 V is from an off-chip voltage source. Negative body bias generators can produce -1 V with nW power consumption [14], and thus, have minimal impact on efficiency at μW load power. At $V_{OUT} = 460$ mV, and using $V_{BB} = 1$ V, the converter achieves a minimum efficiency of 75% for 79 nW to 200 μW (current source). With an off-chip 32-bit processor load, the converter’s

efficiency closely matches the efficiency of the (current source) test load. With the processor load at $f_{CPU} = 6$ MHz, the converter operates with a peak efficiency of 86%. The processor's load power is adjusted by changing the operation frequency of the processor load (f_{CPU}) over a range of 5 MHz to 25 MHz.

To adjust for changes in the load, the control voltage (V_{CTRL}) needs to be adjusted. Figure 8b shows the control voltage (V_{CTRL}) required to tune the converter's oscillation frequency (f_{SW}) in order to achieve the efficiencies shown previously in Figure 8a. At $V_{BB} = 0$ V, increasing the V_{CTRL} is effective in increasing the P_{OUT} up to approximately $5 \mu\text{W}$. At $P_{OUT} = 5 \mu\text{W}$, the drive strength of the charge-transfer is limited with $V_{BB} = 0$ V. Moving to larger P_{OUT} ($>5 \mu\text{W}$) requires the back-gate

Figure 8. Measurement results of the 2:1 converter; (a) Efficiency vs. load power; (b) V_{CTRL} vs. load power at $V_{OUT} = 430$ mV and the standard deviation of V_{CTRL} at a sleep load power of 200 nW and an active load power of 100 μW from nine test chips; (c) Efficiency at $P_{OUT} \approx 5 \mu\text{W}$.

biasing to be increased to $V_{BB} = 1$ V. The measured results of nine test chips in Figure 8b show the distribution of V_{CTRL} required to meet a sleep ($P_{OUT} \approx 200$ nW) and an active load ($P_{OUT} \approx 100 \mu\text{W}$). The standard deviation of V_{CTRL} at the larger load power (i.e., active load) is a result of the larger V_{BB} (i.e., 1 V). Increasing V_{BB} decreases the transistors V_{th} . For a fixed VGS, a lower V_{th} results in an increased inversion level within the (leakage-based) delay cell transistors. As a result, V_{CTRL} is less sensitive to intra-die variations at the active load. The V_{CTRL} is adjusted using an off-chip voltage source; adding closed-loop

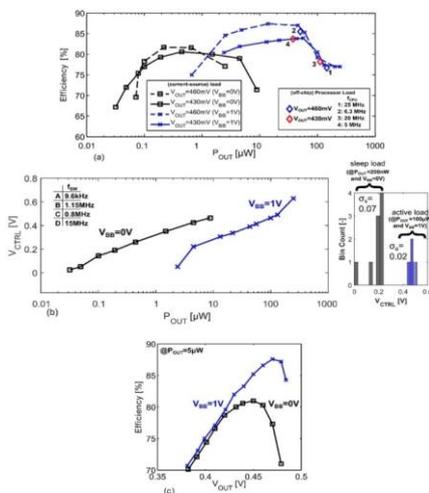


control circuitry of V_{CTRL} to meet load power demands has minimal impact on conversion efficiency [8], even by the lowest load power supported in this work (i.e., 79 nW).

The efficiency of the converter as a function of V_{OUT} at $P_{OUT} = 5 \mu\text{W}$ is shown in Figure 8c. The output impedance of the converter is reduced by increasing V_{BB} to 1 V. A large V_{BB} increases the switching frequency and drive strength of the charge-transfer switches. This allows for the converter

to achieve larger values of V_{OUT} before efficiency tapers off. At $V_{BB} = 0$ V and $V_{BB} = 1$ V, the peak efficiency is at $V_{OUT} = 0.45$ V and $V_{OUT} = 0.47$ V, respectively.

In addition to achieving high efficiencies, the converter needs to have high power density (mW/mm^2) in order to be a cost-effective fully integrated solution. Achieving high power density in converters that operate with below-threshold voltage levels is challenging to the low overdrive voltages of the charge-transfer switches [15]. State-of-the-art power densities for DC-DC converters with near-threshold output voltages are between 2 and 20 mW/mm^2 . By using a self-oscillating converter topology with back-gate biasing, the power density can be significantly improved over the state-of-the-art. The measured power density of the converter for multiple back-gate bias voltages

is shown in Figure 9. The power density of the

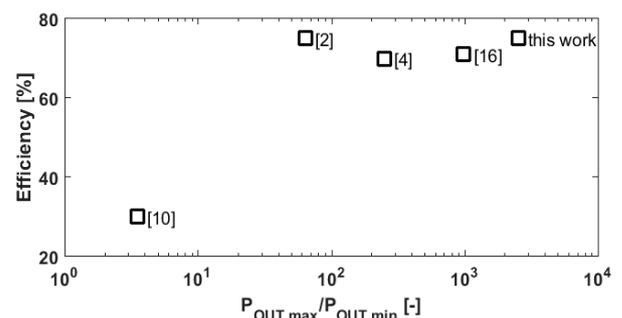

converter can be increased by applying a larger V_{BB} . At $V_{IN} = 1$ V, the maximum power density is $65 \text{ mW}/\text{mm}^2$. At $V_{IN} = 1.2$ V, the maximum power density is $184 \text{ mW}/\text{mm}^2$. The maximum power density is larger at $V_{IN} =$

1.2 V since there is a larger overdrive on all the switches within the top ring oscillator (switches S_1 and S_2) of the converter. The larger overdrive voltage allows for a larger output current to be driven through the switches, thus giving a larger power density.


Figure 9. Measurement results of efficiency vs. power density for increasing back-gate bias voltages at (a) $V_{IN} = 1\text{ V}$ and (b) $V_{IN} = 1.2\text{ V}$.

The converter is compared to state-of-the-art SC DC-DC converters in Table 1. The converter from [16] achieves the closest load range performance to the proposed converter, but at a lower power density. The converter in [5] has the closest power density, but it has a much smaller load range. Additionally, the size of C_{OUT} in [5] is not reported. The proposed converter does not use any additional on- or off-chip C_{OUT} and maintains a ripple $\leq 10\%$ of V_{OUT} . In relation to others, the proposed converter has a higher power density and is able to achieve a high minimum efficiency over a larger load power range as highlighted in Figure 10. The load power range is defined as the maximum ($P_{OUT,max}$) and minimum ($P_{OUT,min}$) load power levels at the output of the DC-DC converter

Figure 10. Comparison to state-of-the-art in terms of efficiency and load range ($P_{OUT,max}/P_{OUT,min}$).

Conclusions

A fully integrated step-down self-oscillating switched-capacitor DC-DC converter was presented. The converter was fabricated in 28 nm UTBB FD-SOI. The self-oscillating topology and utilization of back-gate biasing allowed the converter to achieve high efficiency over a large load power range. A minimum efficiency of 75% for 79 nW to 200 μW loads was achieved. Similar efficiency results were achieved with an off-chip processor in active mode. The converter’s peak efficiency with an off-chip processor load is 86% at $V_{OUT} = 460\text{ mV}$. The power density is over 60 mW/mm^2 with back-gate biasing of $V_{BB} \geq 1\text{ V}$. The large load power range, high power density, and high efficiency make the proposed converter an excellent match for near-threshold energy-constrained processors

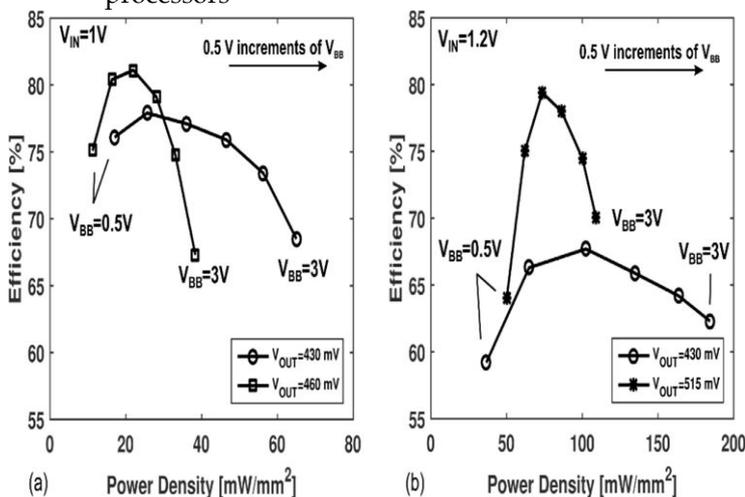

References

- Hienkari, M.; Teittinen, J.; Koskinen, L.; Turnquist, M.; Kaltiokallio, M. A 3.15pj/cyc 32-bit RISC CPU with timing-error prevention and adaptive clocking in 28 nm CMOS. In Proceedings of the 2014 IEEE Custom Integrated Circuits Conference (CICC), San Jose, CA, USA, 15-17 September 2014; pp. 1-4.
- Bol, D.; Vos, J.; Hocquet, C.; Botman, F.; Durvaux, F.; Boyd, S.; Flandre, D.; Legat, J. A 25-MHz 0.4-V Sub-mm2 7- $\mu\text{W}/\text{MHz}$ Microcontroller in 65-nm LP/GP CMOS for Low-Carbon Wireless Sensor Nodes. *IEEE J. Solid-State Circuits* **2013**, *48*, 20-32. [CrossRef]
- Hanson, S.; Seok, M.; Lin, Y.-S.; Foo, Z.; Kim, D.; Lee, Y.; Liu, N.; Sylvester, D.; Blaauw, D. A Low-Voltage Processor for Sensing Applications with Picowatt Standby Mode. *IEEE J. Solid-State Circuits* **2009**, *44*, 1145-1155. [CrossRef]
- Kwong, J.; Ramadass, Y.K.; Verma, N.; Chandrakasan, A.P. A 65 nm Sub-Vt Microcontroller with Integrated SRAM and Switched Capacitor DC-DC Converter. *IEEE J. Solid-State Circuits* **2009**, *44*, 115-126. [CrossRef]
- Clerc, S.; Saligane, M.; Abouzeid, F.; Cochet, M.; Daveau, J.-M.; Bottoni, C.; Bol, D.; De-Vos, J.; Zamora, D.; Coeffic, B.; et al. A 0.33 V/-40 °C process/temperature closed-loop compensation SoC embedding all-digital clock multiplier and DC-DC converter exploiting FDSOI 28nm back-gate biasing. In Proceedings of the IEEE International Solid State Circuits Conference (ISSCC), San Francisco, CA, USA, 22-26 February 2015; pp. 1-3.
- Seongjong, K.; Mingoo, S. Variation-Tolerant, Ultra-Low-Voltage Microprocessor with a Low-Overhead, Within-a-Cycle In-Situ Timing-Error Detection and Correction Technique. *IEEE J. Solid-State Circuits* **2015**, *50*, 1478-1490.
- Sarafianos, A.; Steyaert, M. Fully Integrated Wide Input Voltage Range Capacitive DC-DC Converters: The Folding Dickson Converter. *IEEE J. Solid-State Circuits* **2015**, *50*, 1560-1570. [CrossRef]
- Jung, W.; Oh, S.; Bang, S.; Lee, Y.; Sylvester, D.; Blaauw, D. A 3nW fully integrated energy harvester based on self-oscillating switched-capacitor DC-DC converter. In Proceedings of the IEEE International Solid State Circuits Conference (ISSCC), San Francisco, CA, USA, 9-13 February 2014; pp. 398-399.
- Turnquist, M.; Hienkari, M.; Mýkipýý, J.; Koskinen, L. A fully integrated self-oscillating

switched-capacitor DC-DC converter for near-threshold loads. In Proceedings of the 2015 IEEE Asian Solid-State Circuit Conference (A-SSCC), Xiamen, China, 9-11 November 2015; pp.1-4.

10. Wieckowski, M.; Chen, G.K.; Seok, M.; Blaauw, D.; Sylvester, D. A hybrid DC-DC converter for sub-microwatt sub-1V implantable applications. In Proceedings of the 2009 Symposium on VLSI Circuits (VLSIC), Kyoto, Japan, 16-18 June 2009; pp. 166-167

